



Button

Element	<div><div>FormButton</div></div>
Icon	
Description	Buttons are necessary to leave a form and access the next process step.
Type	Boolean
Prepopulation	This element cannot be prepopulated.
Editing	Refer to Modeling Forms for further information regarding editing of form elements using the context menu.

On this Page:

- [Configuration Options](#)

Simple_Form_Example



Click the icon to download a simple example model that shows how you can **configure form elements** in **Scheer PAS Designer**.

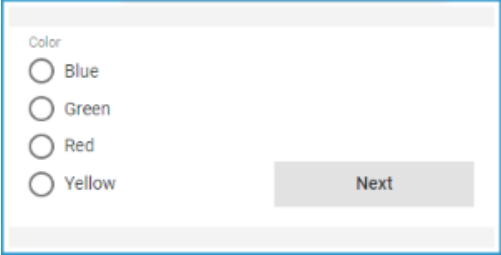

Configuration Options

Use the **Attributes** panel to edit the form element.

Attribute	Description	Allowed Values	
Name	Technical identifier for data processing and not visible for the end user.	Alphanumeric characters and underscore. <div><div><div>i</div><div>It is not allowed to start the name with a number.</div></div></div>	
Description	A commentary field for the developer. The content is invisible to users and its sole purpose is internal documentation.	Any string.	
Label	Field name shown in the form.	Any string.	
Read-only	This field is write-protected. When you use the option, Read-only is added to the bottom right of the element: <div><div><div>Input Field</div><div>Read-only</div></div></div>	true	User cannot enter values.
		false	User can enter values (default).
Primary	The button will be highlighted in blue to distinguish it from other buttons. Use this attribute to indicate to the user that this button is the default button.	true	Button is highlighted.
		false	Button is not highlighted (default).
Vertical Alignment	The attribute is used to adjust the position of a form element in context to a bigger neighboring element. Example: The Radio Button Group Color is much bigger than the Button Next , but the button should be shown at the bottom of the form. Therefore, the button's attribute Vertical Alignment is set to Bottom .	Top	Align the element on top of the element cell (default).
		Center	Align the element in the middle of the element cell.

Related Pages:

- [Supported Form Elements](#)
- [Form - Process Interaction](#)

		<div>B</div> <div>Align the element at the bottom of the form element cell.</div>
CSS Class	Enables a field-accurate layout customization.	A valid CSS class.
Custom Attributes	<p>The attribute is used to activate Angular directives, that are created as development kit (devkit) library to expand the default functionality.</p> <div> For detailed information about Angular directives, visit the official Angular documentation. For details about the usage of the Custom Attributes, refer to Developing Custom Directives.</div>	<ul style="list-style-type: none">• empty attribute• attribute with value (e.g. <code>color="red"</code>)• multiple entries separated by space (e.g. <code>color="red" multiline max="5"</code>)
Symbol Type	Displays the type of the form element in read-only mode.	—