


Services


Menu "Services"

The **Services** menu provides an overview of all services that deliver data.

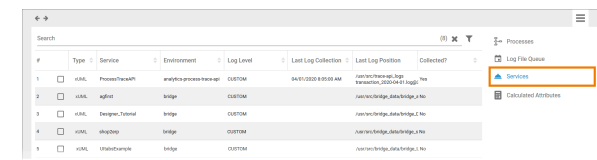

#	Type	Service	Environment	Log Level	Last Log Collection	Last Log Position	Collected?
1	xUML	ProcessTraceAPI	analytics-process-trace-api	DEBUG	2021-03-22 0:05:00 AM	c:\nrc\bridge_data\bridge_c_no	yes
2	xUML	apihub	bridge	DEBUG		c:\nrc\bridge_data\bridge_c_no	yes
3	xUML	Design-Testnet	bridge	DEBUG		c:\nrc\bridge_data\bridge_c_no	yes
4	xUML	shopapp	bridge	DEBUG		c:\nrc\bridge_data\bridge_c_no	yes
5	xUML	UnlabeledSample	bridge	DEBUG		c:\nrc\bridge_data\bridge_c_no	yes

The following information can be found in the list of services:

Column Name	Content
#	Number in the current services list.
<input type="checkbox"/>	Select the checkbox to display the settings for the log collection. For further information see Activating Log Collection .
Type	Service type, in BPaaS and BRIDGE mostly xUML services are used.
Service	Name of the service that provides data. BPaaS processes are summarized in the ProcessTraceAPI service.
Environment	Source system of the service. The default environment for BPaaS data is analytics-process-trace-api .
Log Level	Log Level that was set for this service. <div> The different log levels are explained in detail on page Transaction Log Levels of an xUML Service in the BRIDGE Integration Platform User's Guide.</div>
Last Log Collection	Date and time of the last log collection.
Last Log Position	Indicates up to which position (byte) in the specified file data was read during the last import. The displayed content is a combination of the name of the last read file and the last position in the file.
Collected?	Indicates if the log collection has been activated for this service (Yes) or not (No). For further information see Activating Log Collection .

Log Collection

The list of services enables administrators to monitor the used services. It also allows them to manage the collection of logs.

Activating Log Collection

On this Page:

- [Menu "Services"](#)
- [Log Collection](#)
 - [Activating Log Collection](#)
 - [Deactivating Log Collection](#)

Related Pages:

- [Processes](#)
- [Log File Queue](#)
- [Calculated Attributes](#)

Related Documentation:

- [Process Mining Installation Guide](#)
- [Process Mining](#)
- [BRIDGE Integration Platform User's Guide](#)
 - [Transaction Log Levels of an xUML Service](#)

Search

#	Type	Service	Env
1	<input type="checkbox"/>	ProcessTraceAPI	ana
2	<input type="checkbox"/>	agfirst	brid
3	<input type="checkbox"/>	Designer_Tutorial	brid
4	<input checked="" type="checkbox"/>	shop2erp	brid
5	<input type="checkbox"/>	UltabsExample	brid

xuml:bridge:shop2erp ✕

☐ Collect logs?

Log Level

Custom

If you want to collect the logs of a service, select the checkbox in front of the service's name.

The selected service is shown below the list and the option **Collect logs?** is displayed.

Search

#	Type	Service	Envir
1	<input type="checkbox"/>	ProcessTraceAPI	analytics-p
2	<input type="checkbox"/>	agfirst	bridge
3	<input type="checkbox"/>	Designer_Tutorial	bridge
4	<input checked="" type="checkbox"/>	shop2erp	bridge
5	<input type="checkbox"/>	UltabsExample	bridge

xuml:bridge:shop2erp ✕

☒ Collect logs?

Log Level

Custom

To collect the logs of the selected service, activate the checkbox **Collect logs?**

Then choose the desired Log Level from the drop-down list. The following options are available:

- Custom
- Service
- IO



The different log levels are

explained in detail on page **Transaction Log Level** of **an XML Service** in **the BRIDGE** **Integration** **Platform** **User**

Search (8) x

#	Type	Service	Environment	Log Level	Last Log Collection	Last Log Position	Collected?
1	<input type="checkbox"/>	ProcessTraceAPI	analytics-process-trace-api	CUSTOM	04/01/2020 12:20:00 PM	/usr/src/trace-api/LogTransaction_2020-04-01.log	Yes
2	<input type="checkbox"/>	agfirst	bridge	CUSTOM		/usr/src/bridge_data/bridge_u	No
3	<input type="checkbox"/>	Designer_Tutorial	bridge	CUSTOM		/usr/src/bridge_data/bridge_0	No
4	<input checked="" type="checkbox"/>	shopDep	bridge	IO	04/01/2020 2:10:00 PM	/usr/src/bridge_data/bridgeTransaction_2020-03-31.log	Yes
5	<input type="checkbox"/>	UltimateExample	bridge	CUSTOM		/usr/src/bridge_data/bridge_u	No

sumlbridge:shopDep

☒ Collect logs?

Log Level: IO

APPLY CANCEL

Confirm your input by pressing the **Apply** button.

The content of column **Collected?** will change to **Yes** for this service.

Deactivating Log Collection

Search (8) x

#	Type	Service	Environment	Log Level	Last Log Col...	Last Log Position	Collected?
1	<input checked="" type="checkbox"/>	ProcessTraceAPI	analytics-process-trace-api	CUSTOM	04/01/2020 12:20:00 PM	/usr/src/trace-api/LogTransaction_2020-04-0	Yes
2	<input type="checkbox"/>	agfirst	bridge	CUSTOM		/usr/src/bridge_data/br	No
3	<input type="checkbox"/>	Designer_Tutorial	bridge	CUSTOM		/usr/src/bridge_data/br	No

sumlanalytics-process-trace-api:ProcessTraceAPI

☒ Collect logs?

Log Level: Custom

APPLY CANCEL

The entry in column **Collected?** indicates whether the service logs are collected or not. If the logs are collected, the entry is **Yes**. To deactivate the collection of logs for this service, select the checkbox in front of the service's name.

The selected service is shown below the list and the option **Collect logs?** is displayed.

Search (8) ✕ ▼

#	Type	Service	Environment	Log Level	Last Log Col...	Last Log Position	Collected?
1	<input checked="" type="checkbox"/>	ProcessTraceAPI	analytics-process-trace	CUSTOM	04/01/2020 12:20:00 PM	/usr/src/trace-api/logs/transaction_2020-04-01	yes
2	<input type="checkbox"/>	agfirst	bridge	CUSTOM		/usr/src/bridge_data/br	No
3	<input type="checkbox"/>	Designer_Tutorial	bridge	CUSTOM		/usr/src/bridge_data/br	No

xmlanalytics-process-trace-apiProcessTraceAPI ✕

☐ Collect logs?

Log Level
Custom

APPLY CANCEL

To deactivate log collection for this service, deselect the checkbox **Collect logs?** and confirm your choice with the **A pply** button.

#	Type	Service	Environment	Log Level	Last Log Col...	Last Log Position	Collected?
1	<input type="checkbox"/>	ProcessTraceAPI	analytics-process-trace	CUSTOM	04/01/2020 12:20:00 PM	/usr/src/trace-api/logs/transaction_2020-04-01	No
2	<input type="checkbox"/>	agfirst	bridge	CUSTOM		/usr/src/bridge_data/br	No
3	<input type="checkbox"/>	Designer_Tutorial	bridge	CUSTOM		/usr/src/bridge_data/br	No

The content of column **Collected?** will change to **No** for this service.