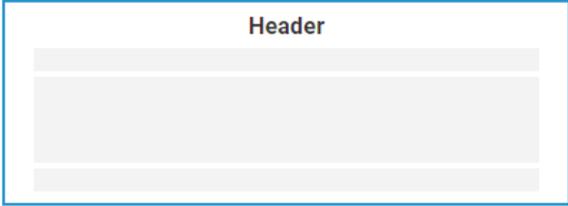



Grouping

Element		On this Page:
Icon		<ul style="list-style-type: none"> Configuration Options
Description	<p>Use the grouping element to arrange other form elements that belong together. You can use the grouping element to break up the grid of the form editor for example to arrange several form elements next to a single field in one line. It can also be used to move and reuse whole sections.</p> <div style="border: 1px solid yellow; padding: 5px; margin-top: 10px;"> <p> Deletion Behavior of Grouping Elements</p> <p>If you delete a grouping element, it is erased from your work area including all content.</p> </div>	<div style="border: 1px solid green; padding: 5px; margin-top: 10px;"> <p>Simple_Form_Example</p> <div style="display: flex; align-items: center;">  <p>Click the icon to download a simple example model that shows how you can configure form elements in <i>Scheer PAS Designer</i>.</p> </div> </div>
Type	n/a	Related Pages:
Prepopulation	This element cannot be prepopulated.	<ul style="list-style-type: none"> Supported Form Elements Grouping Form Elements
Editing	Refer to Modeling Forms for further information regarding editing of form elements using the context menu.	

Configuration Options

Use the **Attributes** panel to edit the form element.

Attribute	Description	Allowed Values				
Name	Technical identifier for data processing and not visible for the end user.	Alphanumeric characters and underscore. <div style="border: 1px solid gray; padding: 5px; margin-top: 10px;"> <p> It is not allowed to start the name with a number.</p> </div>				
Description	A commentary field for the developer. The content is invisible to users and its sole purpose is internal documentation.	Any string.				
Header	In this field you can enter a title.	Any string.				
Show Header	The header can be displayed or hidden.	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30px; text-align: center;">tr u e</td> <td>If this option is activated, the element's header will appear in the top row.</td> </tr> <tr> <td style="width: 30px; text-align: center;">fa lse</td> <td>If this option is disabled the name will not be displayed.</td> </tr> </table>	tr u e	If this option is activated, the element's header will appear in the top row.	fa lse	If this option is disabled the name will not be displayed.
tr u e	If this option is activated, the element's header will appear in the top row.					
fa lse	If this option is disabled the name will not be displayed.					
Number of Columns	Form elements can be arranged in several columns according to selection.	One to six columns.				
CSS Class	Enables a field-accurate layout customization.	A valid CSS class.				

Custom Attributes	<p>The attribute is used to activate Angular directives, that are created as development kit (devkit) library to expand the default functionality.</p> <div data-bbox="272 201 829 327" style="border: 1px solid #c8e6c9; padding: 5px; margin-top: 10px;">  For detailed information about Angular directives, visit the official Angular documentation. For details about the usage of the Custom Attributes, refer to Developing Custom Directives. </div>	<ul style="list-style-type: none"> • empty attribute • attribute with value (e.g. <code>color="red"</code>) • multiple entries separated by space (e.g. <code>color="red" multiline max="5"</code>)
Symbol Type	Displays the type of the form element in read-only mode.	-