


Overview on the Remote Debug View

The **Remote Debug** view can be used to attach in debug mode to a service running on an **E2E Bridge**. In the screenshot below this is a service running on localhost and using port 28823.

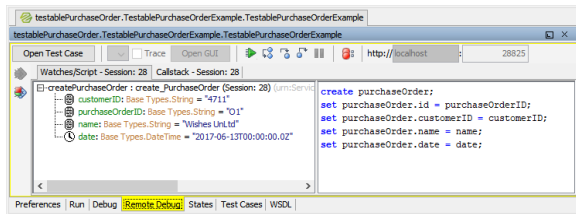

Having done this, the service can be debugged with the **E2E Interactive Debugger** as described in [The Interactive xUML Debugger](#).

Related Pages:

- [Overview on the Debug View](#)
- [The Interactive xUML Debugger](#)
- [xUML Service Model Debugging, Testing and Quality Assurance \(QA\) Concepts](#)