

Overview on the RESTifier UI

The RESTifier for SAP not only has a REST interface but also a graphical user interface. This can be accessed via a browser.

The Layout of the RESTifier UI

Figure: User Interface of the RESTifier for SAP



On this Page:

- [The Layout of the RESTifier UI](#)
- [The Result Area](#)

Related Documentation:


- [RESTifier for SAP Installation Guide](#)

1. **Search Box**
Use the search box to search for a BAPI RFC - just start typing. While you are typing, a list of filtered BAPIs will be displayed in the result area (3).
2. **Search Description**
Used this checkbox to indicate whether you want to search the BAPI name only or include the BAPI description into your search.
3. **Result Area**
The search results will be displayed in this area. For more details see [The Result Area](#) further below.
4. **RESTifier Settings**
Click the cog icon to configure the RESTifier as described on [Configuring the RESTifier for SAP](#).

The Result Area

If you start typing in the search box (e.g. "cust"), the list of filtered BAPIs starts to display.

Figure: Filtered List of BAPIs

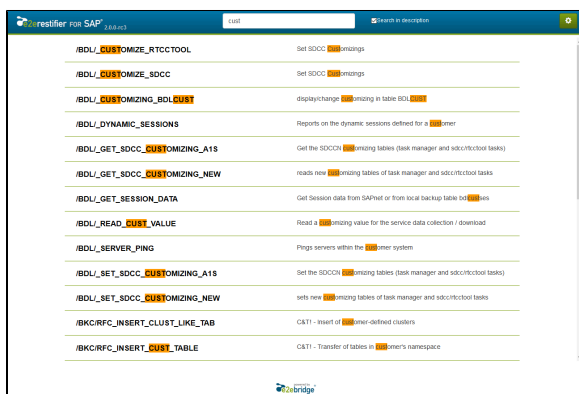

The found search terms are marked in orange. Note, that as checkbox **Search in description** is checked, the description is searched, too (e.g. see esp. /BDL/_GET_SESSION_DATA in the list above).

Click on a BAPI function to display more details.

Figure: BAPI Function Details


BAPI_CUSTOMER_GETDETAIL2 Customer Detail Information

Company code: Company Code PARAM COMPANYCODE TYPE RFCTYPE_CHAR TABLE BAPICUSTOMER_ID FIELD COMP_CODE

Customer: Customer Number PARAM CUSTOMERNR TYPE RFCTYPE_CHAR TABLE BAPICUSTOMER_ID FIELD CUSTOMER

Bank data: PARAM CUSTOMERBANKDETAIL TYPE Array(BAPICUSTOMER_ID)

Buttons: GET /sap/BAPI_CUSTOMER_GETDETAIL2 POST /sap/BAPI_CUSTOMER_GETDETAIL2

The SAP RESTifier displays the function interface details. By clicking the  icon, you can force the RESTifier to reload the details, e.g. if you have applied changes to the interface.

Fill in some parameters and click **GET** or **POST** to send a get or post request to this function.

Figure: Send GET Request

BAPI_CUSTOMER_GETDETAIL2 Customer Detail Information

Company code: Company Code PARAM COMPANYCODE TYPE RFCTYPE_CHAR TABLE BAPICUSTOMER_ID FIELD COMP_CODE

Customer: Customer Number PARAM CUSTOMERNR TYPE RFCTYPE_CHAR TABLE BAPICUSTOMER_ID FIELD CUSTOMER

Bank data: PARAM CUSTOMERBANKDETAIL TYPE Array(BAPICUSTOMER_ID)

Buttons: GET /sap/BAPI_CUSTOMER_GETDETAIL2?CUSTOMERNR=0000008889 POST /sap/BAPI_CUSTOMER_GETDETAIL2

JSON Output: { "CUSTOMERNR": "0000008889" }

The return values of the BAPI call are displayed below the BAPI details.

Figure: Results of BAPI Call

Structured **Raw**

```
{
  "CUSTOMERADDRESS": {
    "CUSTOMER": "0000008889",
    "NAME": "John Doe",
    "CITY": "SPRINGFIELD",
    "DISTRICT": "LANDON",
    "POST_CODE": "67890",
    "STREET": "12 BROADWAY",
    "COUNTRY": "US",
    "COUNTRYISO": "US",
    "LANGU": "E",
    "LANGU_ISO": "EN",
    "SORT_FLG": "PSCH_US",
    "MATCHCODE1": "YOUR_SORT",
    "MATCHCODE3": "SPRINGFIELD",
    "TRANSPZONE": "0000000001"
  },
  "CUSTOMERGENERALDETAIL": {
    "CUSTOMER": "0000008889",
    "ADDRESS": "0000001111",
    "LOC_NO_1": "00000000",
    "LOC_NO_2": "00000",
    "CHK_STATUS": "W",
    "CREAT_DATE": "20030311"
  }
}
```

The following cleaning rules are applied to the response:

- leading and trailing spaces are trimmed from string-like fields

Fields containing only blanks will be removed from the response.

- all empty fields and structures (classes, arrays) are deleted from the response