



# Adding Options to a Test Suite

Each test suite contains a node **Options**, which can be used to add options to a test suite.

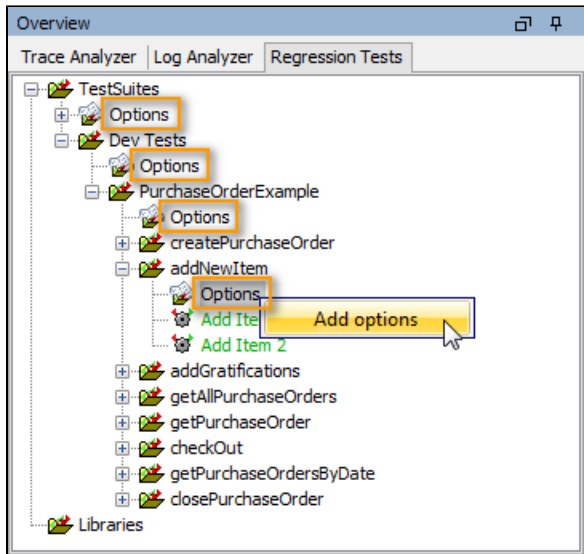

Having subordinated test suites, options can be added at each test suite level. In the process of specifying options you can choose to apply these to subordinate test cases.

Click **Add option** to select an options type from a list, configure it and add it to the test suite.

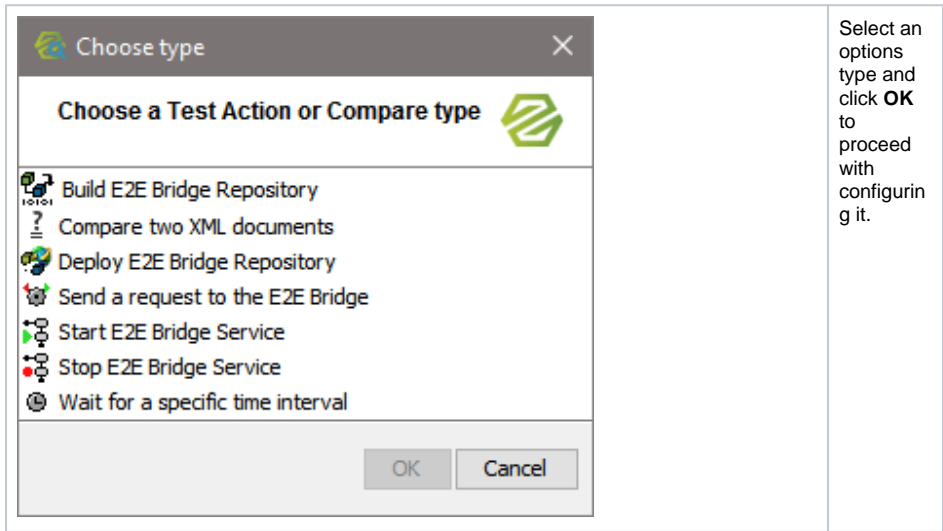


Specify the options you need regarding this options type. Leaving an option empty means, that this option is not overwritten. For an overview on all test options refer to the [table below](#).

## On this Page:

- [Overview on the Test Options](#)

## Related Pages:

- [Options: Build Bridge Repository](#)
- [Options: Compare the Result of a Bridge Request](#)
- [Options: Compare two XML Documents](#)
- [Options: Deploy Bridge Repository](#)
- [Options: Send a Request to a Bridge](#)
- [Options: Start/Stop Bridge Service](#)
- [Options: Wait for a Specific Time Interval](#)

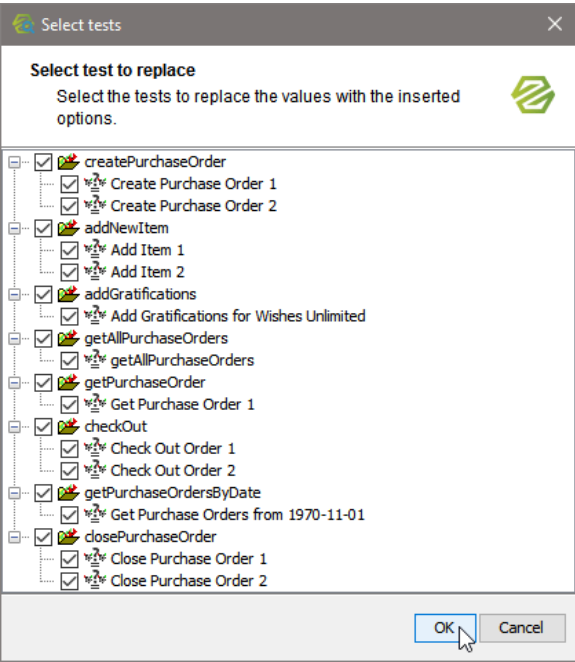

**Select tests**

**Select test to replace**

Select the tests to replace the values with the inserted options.

- ☒ createPurchaseOrder
  - ☒ Create Purchase Order 1
  - ☒ Create Purchase Order 2
- ☒ addNewItem
  - ☒ Add Item 1
  - ☒ Add Item 2
- ☒ addGratifications
  - ☒ Add Gratifications for Wishes Unlimited
- ☒ getAllPurchaseOrders
  - ☒ getAllPurchaseOrders
- ☒ getPurchaseOrder
  - ☒ Get Purchase Order 1
- ☒ checkOut
  - ☒ Check Out Order 1
  - ☒ Check Out Order 2
- ☒ getPurchaseOrdersByDate
  - ☒ Get Purchase Orders from 1970-11-01
- ☒ closePurchaseOrder
  - ☒ Close Purchase Order 1
  - ☒ Close Purchase Order 2

OK Cancel

After having specified the options you can select the test cases you want the options to be applied to. As a default all test cases are selected. Deselect the test cases or test suites you want to omit.

On the selected items, the Regression Test Tool will remove all options that you specified directly on this item and replace them by the superior definition.

Any test option can be removed by selecting **Remove options** from the context menu.

## Overview on the Test Options

Options Type	Description	Used for
<a href="#">Options: Build Bridge Repository</a>	<p>Overwrite one or all of the following options for building an xUML service repository:</p> <ul style="list-style-type: none"> <li>UML document</li> <li>deployment</li> <li>repository</li> <li>build options</li> <li>project folder</li> </ul>	Build test action
<a href="#">Options: Compare the Result of a Bridge Request</a>	<p>Overwrite one or all of the following options for comparing the result of an Bridge request with the reference data:</p> <ul style="list-style-type: none"> <li>check whether the XML response is equal to the reference XML or not</li> <li>set a path to the test folder</li> <li>set a path to the reference folder</li> <li>define differences to ignore</li> </ul>	<p>In the test preferences you can choose between different compare actions. This option is used for the compare action <b>Compare the result of an Bridge request</b>.</p>

Compare two XML documents	<p>Overwrite one or all of the following options for comparing two XML documents:</p> <ul style="list-style-type: none"> <li>• check whether the XML response is equal to the reference XML or not</li> <li>• set a path to the test folder and define whether it is zipped or not</li> <li>• set a path to the reference folder and define whether it is zipped or not</li> <li>• define differences to ignore</li> </ul>	<p>In the test preferences you can choose between different compare actions.</p> <p>This option is used for the compare action <b>Compare two XML documents</b>.</p>
Options: Deploy Bridge Repository	<p>Overwrite one or all of the following options for xUML service deployment:</p> <ul style="list-style-type: none"> <li>• repository file</li> <li>• host and port of the Bridge</li> <li>• user and password of the Bridge</li> <li>• deployment options</li> <li>• logfile location</li> </ul>	Deploy test action
Options: Send a Request to a Bridge	<p>Overwrite one or all of the following options for sending a request to a Bridge:</p> <ul style="list-style-type: none"> <li>• test case name</li> <li>• test case home</li> <li>• SOAP operation</li> <li>• set a path to the output folder</li> <li>• host</li> </ul>	<p>This options are applied to test actions that send a request to a Bridge.</p>
Start Bridge Service Stop Bridge Service	<p>Overwrite one or all of the following preferences:</p> <ul style="list-style-type: none"> <li>• host</li> <li>• port</li> <li>• node name</li> <li>• username</li> <li>• password</li> <li>• path to the log file</li> </ul>	<p>Start Bridge Service test action</p> <p>Stop Bridge Service test action</p>
Wait for a specific time interval	<p>Overwrite the amount of seconds to wait for Wait test actions.</p>	Wait test action