
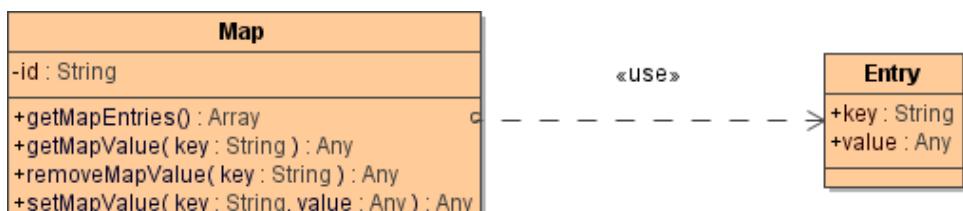


# removeMapValue

Syntax	<pre>set deletedObject = aMap.removeMapValue(aKey)</pre>	
Semantics	Remove the object from map aMap that is identified by akey.	
Substitutables	deletedObject	<i>optional:</i> The map entry identified by akey that is deleted.
	aMap	An object of type Map. 
	aKey	Key value identifying the map entry.
Examples	<pre>hashMap.removeMapValue("John Smith");</pre> <p> address is an object of type Address.</p>	

Example File (Builder project E2E Action Language/Map):



<your example path>\E2E Action Language\map\uml\mapBenchmark.xml

There is no operation to clear an entire map, but this goal can easily be achieved by two action script statements.

```
local entries = hashMap.getMapEntries();
apply hashMap.removeMapValue(element.key) to entries;
```

