

xmlToClass Blobs

Syntax	<pre>set anObject = aBlob.xmlToClass();</pre>	
Semantics	<p>The operation takes an XML buffer as blob (aBlob) and tries to map the XML document to anObject. If this is not possible, an error is raised (e.g. XML parser errors, invalid mappings, etc.).</p> <p>By default the following mapping rules apply:</p> <ul style="list-style-type: none">• XML attributes are mapped to class attributes.• XML elements are mapped to class associations ends. <p>These default rules can be overridden by using <code><<XMLElement>></code>, <code><<XMLAttribute>></code>, and <code><<XMLCharacters>></code> stereotypes on UML class attributes and UML association ends. More about these mapping rules, stereotypes and tagged values (e.g. for number and date & time formatting) can be found in section XML - UML Class Mapping.</p> <div style="border: 1px solid #ccc; padding: 5px; margin-top: 10px;"><p>Frequently, an XML document is given as a string instead of a blob. In such cases, it is possible to apply <code>xmlToClass()</code> to a string as well. For details see xmlToClass() Operation for Strings.</p></div>	
Substitutables	aBlob	Can be any variable or object attribute having the type Blob .
	anObject	Target object, can be any object.
Error Codes	Find the related error codes on Log Errors of domain XMLLM .	
	XMLLM/3	The native XML parser reported a fatal error during parsing. Read more on Troubleshooting XML - UML Class Mapping for more information if you cannot resolve such errors.

On this Page:

- [XML Parsing Options \(Validation against a Schema\)](#)

Related Pages:

- [xmlToClass\(\) Operation for Strings](#)
- [XML - UML Class Mapping](#)
- [Troubleshooting XML - UML Class Mapping](#)
- [Log Errors of domain XMLLM](#)

Related Documentation:

- [Deploying and Managing Resources](#)

Examples

```
set myAddress = addressASXMLDocument.xmlToClass();
```

The following action script creates an object of type **Address**. An output object node named **myAddress** of type **Address** needs to be defined in the activity diagram.

```
create myAddress;  
set myAddress = addressASXMLDocument.xmlToClass();
```


Below, a sample XML document is shown to illustrate the mapping executed by `xmlToClass()` operation. The XML document is mapped to an instance of **Address** as depicted in the class diagram:

```
<myAddress id="myAddressID">  
  <street>Lautengartenstr. 12</street>  
  <city>Basel</city>  
  </myAddress>
```



Note, that the XML element `myAddress` is of type **Address**. This type has the UML attribute `id`, which corresponds to the XML attribute `id`. Additionally, the XML elements `street` and `city` are mapped to the association ends `city` respectively `street`. Both are having the type **String**.

Example File (Builder project E2E Action Language/XML):



```
<your example path>E2E Action Language/XML\uml\xmlSimpleConversions.xml  
<your example path>E2E Action Language/XML\uml\xmlComplexConversions.xml
```

XML Parsing Options (Validation against a Schema)

The optional parameter of `xmlToClass()` of type **XMLOptions** offers various parameters to control schema and DTD location and validation:

Figure: XML Parse Options Class


XMLParseOptions	
+disableDefaultEntityResolution	: Boolean
+entityExpansionLimit	: Integer
+externalNoNamespaceSchemaLocation	: String
+externalSchemaLocation	: String
+namespacePrefixes	: Boolean
+namespaces	: Boolean
+nonvalidatingLoadExternalDTD	: Boolean
+scannerName	: String
+standardURIConformant	: Boolean
+validation	: Boolean
+validationDynamic	: Boolean
+validationIdentityConstraintChecking	: Boolean
+validationSchema	: Boolean
+validationSchemaFullChecking	: Boolean
+validationSchemaSkipDTDValidation	: Boolean

Be aware that by default, schemas are parsed, but documents are not validated against them. Set the **validation** attribute to **true** if you want to enforce validation beyond well-formedness. For example, assume that you want to validate your document against a schema called **CustomerData.xsd** having the namespace <http://example.com/customer> . Then, the following **xmlOption** attributes have to be set:

```
externalSchemaLocation = "http://example.com/customer CustomerData.xsd" ;
validation = true;
```

If the XML document refers a schema file (.xsd) with filename (and optional path), it is sufficient to put the schema file into the folder **<e2e data>/resource**. The E2E Bridge will automatically load this one instead of the specified. Using the administration interface of the Bridge, it is possible to load XML schemas into this folder remotely by using the following dialog:

Figure: Uploading XML Schemas

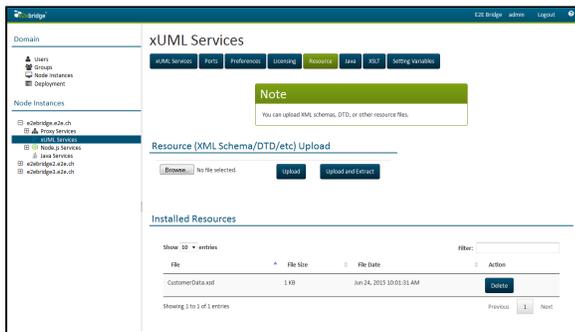

Refer to [Deploying and Managing Resources](#) in the Bridge User's Guide for more information on uploading of resources to the E2E Bridge.

If the XML document refers no schema or you would like to provide another than the referred one, use the **XMLParseOptions** structure and set **externalSchemaLocation** (or **externalNoNamespaceSchemaLocation**) accordingly. As above, missing or relative paths will be redirected to the folder **<e2e data>/resource**. The same applies also for validating against DTDs. Be aware that validation is turned off by default (see option **validation** below).

The following table lists all available XML options. Default values used when an option is not explicitly set are written in bold. Since the Bridge is using the Xerces parser internally, more information for all options can be found on the Xerces home page by following the **read more** link in the **Description** column.

Option	Description	Values	
validation	If this feature is set to true , the document must specify a grammar. If this option is set to false and document specifies a grammar, that grammar might be parsed but no validation of the document contents will be performed.	tr ue	Report all validation errors.

	read more	false	Do not report validation errors.
validationDynamic	read more	true	The parser will validate the document only if a grammar is specified. (validation must be true).
		false	Validation is determined by the state of the validation option.
validationSchema	If set to true , the option namespaces must also be turned on. read more	true	Enable the parser's schema support.
		false	Disable the parser's schema support.
validationSchemaFullChecking	This option checks the schema grammar itself for additional errors that are time-consuming or memory intensive. It does not affect the level of checking performed on document instances that use schema grammars. read more	true	Enable full schema constraint checking, including checking which may be time-consuming or memory intensive. Currently, particle unique attribution constraint checking and particle derivation restriction checking are controlled by this option.
		false	Disable full schema constraint checking.
nonvalidatingLoadExternalDTD	This feature is ignored and DTD is always loaded when the option validation is true . read more	true	Load external DTD.
		false	Ignore external DTD completely.
standardURIConformant	If set to true , malformed URI will be rejected and fatal error will be issued. read more	true	Force standard URI conformance.
		false	Do not force standard URI conformance.
validationIdentityConstraintChecking	read more	true	Enable identity constraint checking.
		false	Disable identity constraint checking.
validationSchemaSkipDTDValidation	read more	true	When validationSchema is true the parser will ignore the DTD, except for entities.
		false	The parser will not ignore DTDs when validating.
disableDefaultEntityResolution	read more	true	The parser will not attempt to resolve the entity if the E2E Bridge can't find it.
		false	The parser will attempt to resolve the entity on its own if the E2E Bridge can't find it.
namespaces	If the validation option is set to true , then the document must contain a grammar that supports the use of namespaces. read more	true	Perform Namespace processing.
		false	Do not perform Namespace processing.
namespacePrefixes	read more	true	Report the original prefixed names and attributes used for Namespace declarations.
		false	Do not report attributes used for Namespace declarations, and optionally do not report original prefixed names.

externalSchemaLocation	<p>The XML Schema Recommendation explicitly states that the inclusion of schemaLocation/noNamespaceSchemaLocation attributes in the instance document is only a hint; it does not mandate that these attributes must be used to locate schemas.</p> <p>Similar situation happens to <import> element in schema documents. This property allows the user to specify a list of schemas to use. If the targetNamespace of a schema specified using this method matches the targetNamespace of a schema occurring in the instance document in schemaLocation attribute, or if the targetNamespace matches the namespace attribute of <import> element, the schema specified by the user using this property will be used (i.e., the schemaLocation attribute in the instance document or on the <import> element will be effectively ignored).</p> <p>read more</p>	<p>The syntax is the same as for schemaLocation attributes in instance documents: e.g, "http://www.example.com file_name.xsd". The user can specify more than one XML Schema in the list.</p>								
externalNamespaceSchemaLocation	<p>The XML Schema Recommendation explicitly states that the inclusion of schemaLocation/noNamespaceSchemaLocation attributes in the instance document is only a hint; it does not mandate that these attributes must be used to locate schemas. This property allows the user to specify the no target namespace XML Schema Location externally. If specified, the instance document's noNamespaceSchemaLocation attribute will be effectively ignored.</p> <p>read more</p>	<p>The syntax is the same as for the noNamespaceSchemaLocation attribute that may occur in an instance document: e.g. "file_name.xsd".</p>								
scannerName	<p>This property allows the user to specify the name of the XMLScanner to use for scanning XML documents.</p> <p>read more</p>	<p>The recognized scanner names are:</p> <table border="1" data-bbox="821 747 1065 1730"> <tr> <td data-bbox="821 747 850 989">W F X M L S c a n n e r</td> <td data-bbox="859 747 1065 989">A scanner that performs well-formedness checking only.</td> </tr> <tr> <td data-bbox="821 999 850 1220">D G X M L S c a n n e r</td> <td data-bbox="859 999 1065 1220">A scanner that handles XML documents with DTD grammar information.</td> </tr> <tr> <td data-bbox="821 1230 850 1472">S G X M L S c a n n e r</td> <td data-bbox="859 1230 1065 1472">A scanner that handles XML documents with XML schema grammar information.</td> </tr> <tr> <td data-bbox="821 1482 850 1730">I G X M L S c a n n e r</td> <td data-bbox="859 1482 1065 1730">A scanner that handles XML documents with DTD or/and XML schema grammar information.</td> </tr> </table>	W F X M L S c a n n e r	A scanner that performs well-formedness checking only.	D G X M L S c a n n e r	A scanner that handles XML documents with DTD grammar information.	S G X M L S c a n n e r	A scanner that handles XML documents with XML schema grammar information.	I G X M L S c a n n e r	A scanner that handles XML documents with DTD or/and XML schema grammar information.
W F X M L S c a n n e r	A scanner that performs well-formedness checking only.									
D G X M L S c a n n e r	A scanner that handles XML documents with DTD grammar information.									
S G X M L S c a n n e r	A scanner that handles XML documents with XML schema grammar information.									
I G X M L S c a n n e r	A scanner that handles XML documents with DTD or/and XML schema grammar information.									

entityExpansionLimit	To mitigate an entity expansion attack (aka "XML bomb" or "the billion laughs" attack) you use this tagged value to limit entity expansion to the specified level.	Any integer, no default. <div data-bbox="829 180 1058 344" style="border: 1px solid orange; padding: 5px; margin-top: 10px;">If using this tagged value, provide at least value 1. Otherwise the standard XML entities will not be parsed.</div>
-----------------------------	--	---