


Killing E2E xUML Services

In some cases, an xUML service cannot be stopped normally via the **Stop** button any more and needs to be killed.
Only users who are member of a group, to which the role **ADMIN** has been assigned, are allowed to kill xUML services.

In the navigation, select the xUML service you want to kill. On the **xUML Service** tab, click **Kill**.

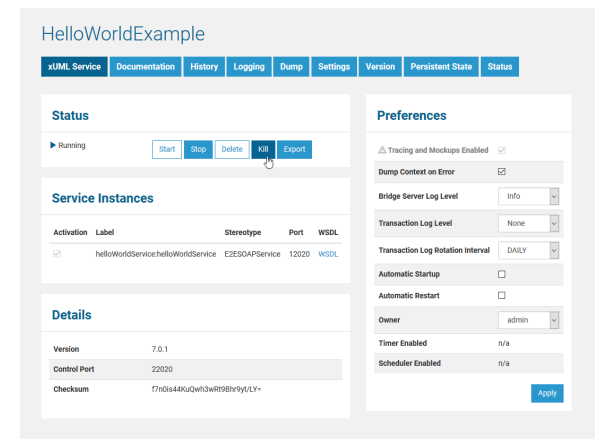

Related Pages:

- [Starting and Stopping xUML Services](#)
- [E2E xUML Service Cannot be Stopped](#)

<div><div>Kill Process</div><div>Kill xUML service process 'HelloWorldExample' with process id '7048'?</div><div><div>Kill Process</div><div>Cancel</div></div></div>	<p>You need to confirm the kill transaction by clicking Kill Process. You may also Cancel the transaction.</p>
<div>Killed process with process id 11416. ✕</div>	<p>In a message box, a success or an error message is displayed. If the xUML service could not be killed, refer to E2E xUML Service Cannot be Stopped.</p>