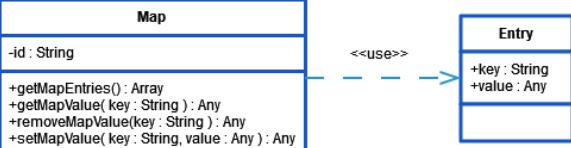



getMapValue

Syntax	<pre>set anObject = map.getMapValue(aKey)</pre>	Related Pages:
Semantics	Get the object from map map that is identified by akey. If the map value cannot be found, NULL is returned.	<ul style="list-style-type: none">buildMap() OperationgetMapEntries() OperationgetMapView() OperationremoveMapView() OperationsetMapView() Operation
Substitutables	anObject	The map entry identified by akey.
	map	An object of type Map. 
	aKey	Key value identifying the map entry.
Examples	<pre>create address; set address = hashMap.getMapValue("John Snow");</pre>  <p>address is an object of type Address.</p>	