



# Date Picker

Element	
Icon	
Description	Date field with the options of manual or calendar supported input.
Type	DateTime
Prepopulation	<p>This element can be prepopulated.</p> <ul style="list-style-type: none"><li>You can set a default value in the <b>Attributes</b> panel to be applied before displaying the form. Refer to <a href="#">Changing BPMN Element Attributes</a> for more information.</li><li>You can overwrite these defaults dynamically in the <b>Get Data</b> execution of a user task. How to do this is explained on <a href="#">Using Forms</a>.</li></ul>
Editing	Refer to <a href="#">Modeling Forms</a> for further information regarding editing of form elements using the context menu.

## On this Page:

- [Configuration Options](#)

## Simple\_Form\_Example




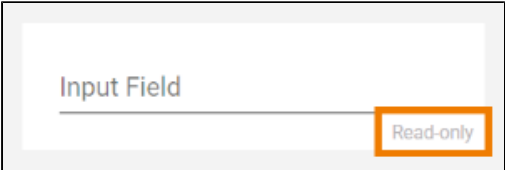
Click the icon to download a simple example model that shows how you can **configure form elements** in **Scheer PAS Designer**.




## Related Pages:

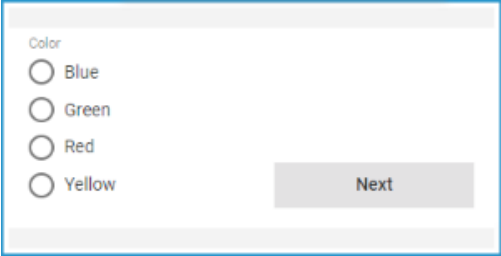

- [Supported Form Elements](#)

## Configuration Options

Use the **Attributes** panel to edit the form element.

Attribute	Description	Allowed Values	
Name	Technical identifier for data processing and not visible for the end user.	Alphanumeric characters and underscore.   It is not allowed to start the name with a number.	
Description	A commentary field for the developer. The content is invisible to users and its sole purpose is internal documentation.	Any string.	
Label	Field name shown in the form.	Any string.	
Mandatory	The element must be filled or used if the checkbox is activated.	true	Element must be filled.
		false	Element may remain empty (default).
Read-only	This field is write-protected. When you use the option, <b>Read-only</b> is added to the bottom right of the element: 	true	User cannot enter values.
		false	User can enter values (default).

Default Date	<p>By default the field is empty. Use the calendar  in the element or in the Attributes panel to preset a date:</p> <div><div>FormDatePicker</div><div><div>FEB 2021</div><div>&lt;</div><div>&gt;</div><div>Su</div><div>Mo</div><div>Tu</div><div>We</div><div>Th</div><div>Fr</div><div>Sa</div><div>FEB</div><div>1</div><div>2</div><div>3</div><div>4</div><div>5</div><div>6</div><div>7</div><div>8</div><div>9</div><div>10</div><div>11</div><div>12</div><div>13</div><div>14</div><div>15</div><div>16</div><div>17</div><div>18</div><div>19</div><div>20</div><div>21</div><div>22</div><div>23</div><div>24</div><div>25</div><div>26</div><div>27</div><div>28</div><div>13</div><div>:</div><div>52</div><div>:</div><div>56</div><div>✓</div></div><p>Save your default date by clicking on the check button. The set date and time are displayed in the element:</p><div><div>FormDatePicker</div><div>17.02.2021 13:56:37</div><div></div></div></div>	
Date Format	<p>Use this field to define the format, in which the date shall be displayed. You can choose between three date formats.</p>	<div><div>DD. MM. YY YY</div><div>Date is displayed in order day-month-year (default). Example: 31.12.2099</div></div> <div><div>MM. DD. YY YY</div><div>Date is displayed in order month-day-year. Example: 12.31.2099</div></div> <div><div>YY. YY. MM .DD</div><div>Date is displayed in order year-month-day. Example: 2099.12.31</div></div>
Use Current Date	<p>The current date and time is used.</p> <div><div></div><div>If <b>Use Current Date</b> is enabled, you cannot use the calendar (attribute <b>Default Date</b>) any more.</div></div>	<div><div>true</div><div>The current date is displayed.</div></div> <div><div>false</div><div>The entered date is displayed.</div></div>
Vertical Alignment	<p>The attribute is used to adjust the position of a form element in context to a bigger neighboring element.</p>	<div><div>Top</div><div>Align the element on top of the element cell (default).</div></div>

<p><b>Example:</b> The <b>Radio Button Group</b> <b>Color</b> is much bigger than the <b>Button</b> <b>Next</b>, but the button should be shown at the bottom of the form. Therefore, the button's attribute <b>Vertical Alignment</b> is set to <b>Bottom</b>.</p> 		Center	Align the element in the middle of the element cell.
		Bottom	Align the element at the bottom of the element cell.
<b>CSS Class</b>	Enables a field-accurate layout customization.	A valid CSS class.	
<b>Custom Attributes</b>	<p>The attribute is used to activate Angular directives, that are created as development kit (devkit) library to expand the default functionality.</p> <div> For detailed information about Angular directives, visit the <a href="#">official Angular documentation</a>. For details about the usage of the <b>Custom Attributes</b>, refer to <a href="#">Developing Custom Directives</a>.</div>	<ul style="list-style-type: none"><li>• empty attribute</li><li>• attribute with value (e.g. <code>color="red"</code>)</li><li>• multiple entries separated by space (e.g. <code>color="red" multiline max="5"</code>)</li></ul>	
<b>Symbol Type</b>	Displays the type of the form element in read-only mode.	—	