

Creating a Component Diagram

The following sections are ordered according the steps needed to create a component diagram and describe each creation step in detail.

1. [Assigning the Diagram Name](#)
2. [Defining the Composite](#)
3. [Defining the Frontend Service](#)
4. [Defining the SOAP Service Interface](#)
5. [Defining Backend Aliases](#)
6. [Finishing the Components Wizard](#)

Step 1: Assigning the Diagram Name

After starting the Components Wizard, the first dialog opens, and you are prompted to enter the name of the component diagram.

	You may use the default name suggested or enter a descriptive name. Changing the name will change the name of the top most tree node (marked in blue) in the navigation panel. Click Next to proceed or Cancel to abort.
--	--

The Components Wizard can be canceled any time.

	After clicking cancel, the Components Wizard prompts for confirmation.
--	---

Step 2: Defining the Composite

With the next step, you define the service composite. The service composite represents the repository of the Web service and will contain all necessary configuration information.

On this Page:

- [Step 1: Assigning the Diagram Name](#)
- [Step 2: Defining the Composite](#)
- [Step 3: Defining the Frontend Service](#)
- [Step 4: Defining the SOAP Service Interface](#)
- [Step 5: Defining Backend Aliases](#)
- [Step 6: Finishing the Components Wizard](#)

Related Pages:

- [Defining More Than One Deployment](#)
- [Frontend Components](#)
- [Creating an Alias](#)

«E2EComposite»


EducationLesson3

```
{category = "E2E Education",
controlPort = 21111,
killJVMThreadsOnShutdown,
wsdlPerService}
```

Clicking **Next** after having assigned the diagram name will bring you directly to the following dialog. Create the service composite here.


New Composite

Create New Composite
Enter name and documentation of the new composite.

Standard
Advanced
Test
Persistent State
JVM
S
◀
▶

Name
EducationLesson3


Control Port
21111

Documentation
Please enter documentation here

OK
Cancel


Assign a name to the composite. In the field **Control Port**, enter an unused port number (the value needs to be between 20'000 and 29'999).

i Special characters and blanks are not allowed for composite names.

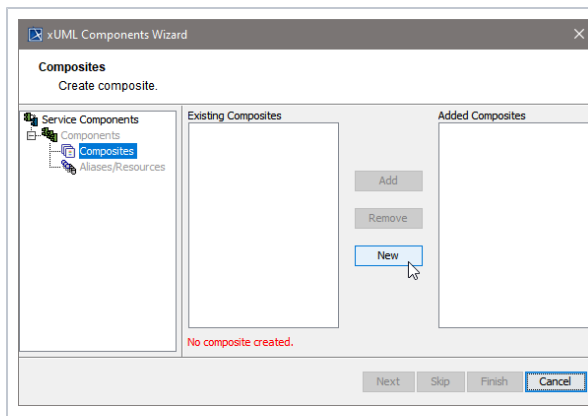

In case you accidentally clicked the **Cancel** button, the **Create new Composite** window can be re-opened by clicking the **New** button.

The **Create New Composite** dialog contains four more tabs.

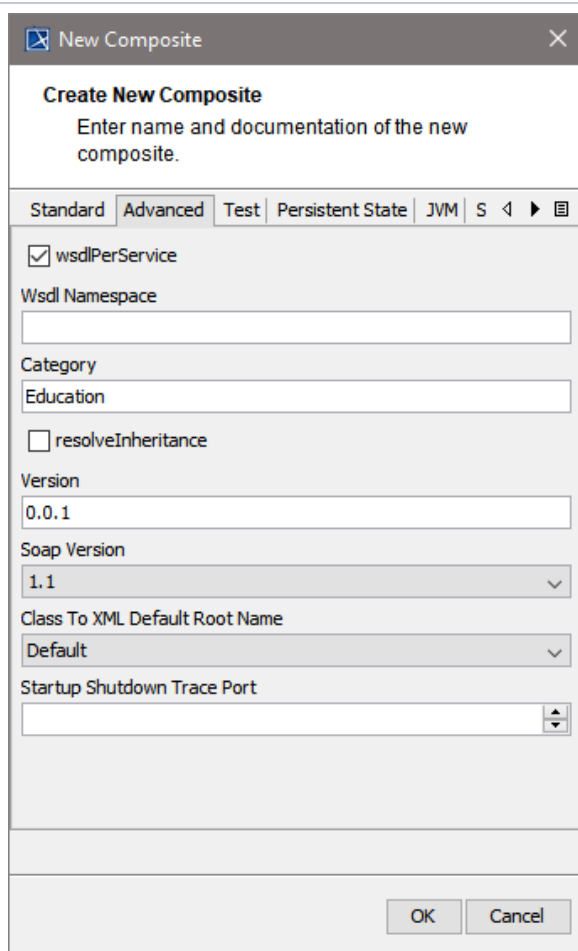

On the **Advanced** tab of this dialog, you can configure advanced composite settings as tagged values to the composite.

Tagged Value	Description
wsdlPerService	If true (default=false) , each xUML service gets its own WSDL file. Additionally, all XML Schema elements and types having the same namespace are put into one schema file. These schema files are imported into the WSDLs to be shared among them. In this case it is also possible to mix RPC /soap-encoded services with Document /literal services.
WSDL Namespace	Target WSDL namespace of the generated WSDL file. Relevant only, if wsdlPerService is false (this is the default).

Category	Optional category to group similar xUML services.
resolveInheritance	If true, the inheritance hierarchy is resolved into flat messages. As of Bridge 7 , setting resolveInheritance to true is deprecated, because this will generate a different output structure than modeled. It also has hidden requirements to the element uniqueness.
Version	A service version number. This service version is visible in service context on the Bridge.
Soap Version	Specify the version of the SOAP protocol you want to use with the service.
Class To XML Default Root Name	Bridge 7 Specify which name to assign to the XML root element upon serializing. This setting can be overridden by using XML composer options as described on classToXML() Operation . Refer to XML - UML Class Mapping for more information on the topic of XML serialization.

Startup Shutdown Trace Port	Default port for tracing startup or shutdown activities is 30000 . You can change this default here, if necessary.
------------------------------------	---

For more information on these tagged values refer to [Frontend Components](#).

New Composite

Create New Composite

Enter name and documentation of the new composite.

Standard

Advanced

Test

Persistent State

JVM

S

◀

▶

☰

☐ generateTestService

Test Service Name

Test Port

55555

Test Encoding

rpc/soap

Test Proxy Host

Test Proxy Port

Test Proxy Protocol

https

Test Proxy Path

External Test Proxy Host

OK

Cancel

Specify the test settings here.

Tagged Value	Description
generateTestService	Enables or disables testing. If true, a test SOAP service will be generated for all <<E2ETestable>> classes.
Test Service Name	Defines the name of the generated test service.
Test Port	Defines the number of the test service port.

**Test
Encoding**

Defines the encoding of the test SOAP operations. `rpc/soap` is recommended , because this matches well with the semantics of UML operations.



If this value is set and other services of the composite have different encodings , the **tags** **wsdl:service** must be set to true.

**Test
Proxy
Host**

Specifies the deployment host.

**Test
Proxy
Port**

Specifies the proxy port the test service is listening to.

**Test
Proxy
Protocol**

Specifies the used protocol.

Test Proxy Path	Specifies the part of the overall URL that is mapped to the actual host name and port.  If this tagged value is used, the modeler must ensure, that this value is unique within the proxy.
External Test Proxy Host	Specifies the host name as seen by the client. If a server certificate is used, it must be issued for this name. If this value is not set, the name of the node hosting the proxy is being used.

For more information on testing in general refer to [xUML Service Model Debugging, Testing and Quality Assurance \(QA\) Concepts](#).

Using Persistent State features in the xUML service, you can make corresponding adjustments on the **Persistent State tab**, and configure the persistent state engine.

Tagged Value	Description
Workers	

New Composite

Create New Composite

Enter name and documentation of the new composite.

Standard

Advanced

Test

Persistent State

JVM

S

◀

▶

☰

Workers

3

Storage Medium

memory

Internal State Database Sync

<UNDEFINED>

External Database Alias

Owner

☐ switchOverEnabled

Switch Over Retry Timeout

600

Event Selection Algorithm

default

External Properties State DB Alias

<UNDEFINED>

OK

Cancel

Workers defines the maximum number of parallel threads used to process pending events. The default setting is 5, which is used if none or 0 workers are configured. The implications of more or less workers are discussed in [Performance Considerations of Persistent State](#).

 Each active worker requires one license slot (concurrent connection) to process activities. For more information on licensing and current connection s, refer to [License for Running xU ML Services](#).

Storage Medium	Storage Medium defines where the persisted data and additional information like pending events and current states are kept. See section Data Storage for a discussion of the options. When using a database instance as storage medium, make sure to configure components and deployment of the SQL adapter as described in section SQL Adapter.
Internal State Database Sync	Internal State DB Synch defines the level of file system synchronization performed on the internal persistent state database.  For production set up, we recommend using FULL synch.
External Database Alias	If you are using an external storage medium, you can specify the DB alias in External State DB Alias.

Owner	Owner specifies the owner of the persistent state objects. Default owner (used when no divergent owner is specified) is the xUML service name, which is unique on each node instance.
Switch Over Enabled	During fail over, the E2E xUML Runtime will try to create a new database connection to a compensatory database (see Switch Over Enabled). If this fails, the xUML Runtime will try to open a new connection every second until the timeout (in seconds) is reached. Default is 600 seconds .

Switch Over Retry Timeout	This flag enables the automatic fail over mechanism for clustered persistent state databases. If the persistent state database becomes inoperative, the E2E xUML Runtime will try to open a connection to compensatory database of the cluster. See also option Switch Over Retry Timeout.  This option is available for clustered Oracle databases only.
----------------------------------	---

Event Selection Algorithm	Runtime 2019.2 Builder 7.4.0 The xUML Runtime processes the persistent state events in a defined order. Select the event selection algorithm the xUML Runtime should use to define this order of events. Refer to Performance Considerations of Persistent State > Event Selection Algorithm for more details on when to use which algorithm.
----------------------------------	---

 Services using this tagged value (all options but the default **<not specified>**) will not start on a Runtime below 2019.2.

External Properties State DB Alias	Runtime 2019.8 Builder 7.6.0 Specify the database alias of the external database you want to store external persistent data to. For more information on external data, refer to Persistent State Classes > External Persistent Data.
---	--

For more information [Persiste
nt State Components.](#)

New Composite

Create New Composite

Enter name and documentation of the new composite.

Standard | **Advanced** | Test | Persistent State | JVM | S | ◀ | ▶ | ☰

JVM Options

+

-

☒ killJVMThreadsOnShutdown

Parallel JVM Operations

10

↑

↓

OK

Cancel


Using Java services in the xUML service, you can specify the JVM options here.

Tagged Value	Description
JVM Options	Java Virtual Machine options. The option strings has one of the following formats: "-D=...", "-X...", "...". The system properties java.class.path and java.library.path are set by the model compiler and can not be overridden in the model.
killJVMThreadsOnShutdown	If threads are still running on shutdown they are killed.
Parallel JVM Operations	Number of parallel open JavaVM threads within the runtime. Default: 100. If the limit is reached, the runtime tries for 60 seconds to obtain a free JVM thread. If it does not succeed, an error (JAVAADLM /19) is thrown.

For more information on Java Components refer to [Modeling the Java Components](#).

Click **OK** to proceed.

Up to this point, you have defined the xUML service component **EducationLesson3**.

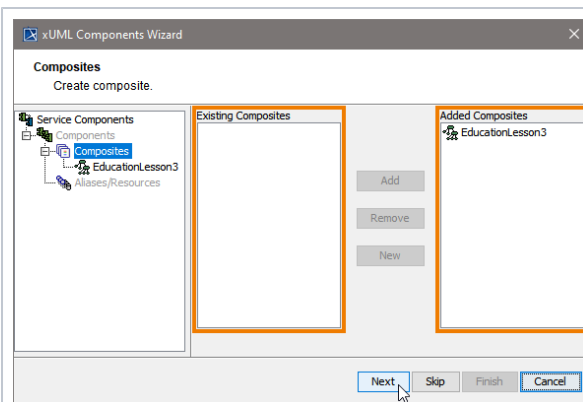


In the customization panel, you can find the new xUML service component (e. g. **EducationLesson3**) in the list of added composites on the right side.

i The left side of the customization panel contains available components, classes, or interfaces. The right side always contains the used components.

Click **Next** to proceed.

Step 3: Defining the Frontend Service

In the next step, you define the frontend service that will be part of the xUML service.

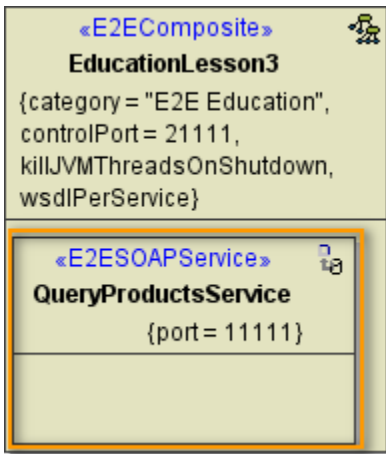

Clicking **Next** after having defined the composite will bring you directly to the following dialog. Add a frontend service here.

Service Stereotypes Select Service Stereotype Choose a service stereotype to create a new service. Create from Stereotype - E2EEventObserverService - E2EHTTPService E2EJavaService - E2ERESTService - E2ESAPRFCService - E2ESchedulerService - E2ESOAPService - E2ETimerService OK Cancel	Select a service type from the list.
xUML Components Wizard Services Create service and add them to composite 'EducationLesson3': Service Components - Components - Composites EducationLesson3 - Aliases/Resources Existing Services Added Services Add Remove New Next Skip Finish Cancel	In other cases, e.g. if you want to add additional services, you can open the above dialog by clicking New on Services level of the tree.

All possible frontend service stereotypes are listed:

- E2EEventObserverService - E2EHTTPService - E2EJavaService - E2ESAPRFCService - E2ESchedulerService - E2ESOAPService - E2ETimerService	- several ActiveMQ versions - GlassFishMQ-4.4 - Weblogic-10.3 - WebshpereMQ-6-NoJNDI - WebshpereMQ-7	- XSLTProcessor - ApacheFOP - Saxon6 and 8 - Xalan2 - XalanTrax2	UIRepository
---	--	--	--



Service Stereotypes

Select Service Stereotype

Choose a service stereotype to create a new service.

Create from Stereotype

E2EventObserverService

E2HTTPService

E2JavaService

E2REESTService

E2SAPRFCService

E2SchedulerService

E2SOAPService

E2TimerService

OK

Cancel

This example shows how to define a Web service. Select the service stereotype **E2ESOAPService**.

Proceed with **OK**.



New SOAP Service

Create New SOAP Service

Enter name and documentation of the new SOAP service.

Standard

Advanced

Proxy

Name

QueryProductsService

Port

11111

Encoding

<UNDEFINED>

Timezone

Date Format String

Max Request Body Size

2048

Max Parallel Connections

50

☒ resolveHostnames

Documentation

Please enter documentation here

OK

Cancel

Now, customize the service artifact.

Tagged Value	Description
Name	Assign a Name .
Port	Assign a Port , to which the SOAP service is listening (the value needs to be between 10'000 and 19'999).
Encoding	Select an encoding . See Encoding of SOAP Operations for more information on SOAP encoding of xUML services.
Timezone	Time zone string as specified in the time zone appendix . timezone is used to print DateTime expressions.
Date Format String	Date formatting code as listed in Date and Time Formatting . If nothing is defined, the XSD standard is used.

Max Request Body Size	Runtime 2021.2 Specifies the maximum size of the request in KB (1 KB = 1024 Bytes). This can be used to prevent DoS or similar attacks. When the payload of the service exceeds the given maximum, incoming request are rejected.
Max Parallel Connections	Maximum number of requests that can be processed in parallel.
resolveHostnames	Automatically resolve IP addresses to domain names.

The **Create New SOAP Service** dialog contains two more tabs.

On the **Advanced** tab, you can specify the following settings:

Tagged Value	Description
WSDL Namespace	Specifies the target namespace of the generated WSDL file. This is relevant only, if wsdlPerService in the xUML composite is true (see Frontend Components).
Authentication Mode	

New SOAP Service

Create New SOAP Service
Enter name and documentation of the new SOAP service.

Standard | **Advanced** | Proxy

WSDL Namespace

Authentication Mode
None

User

OK Cancel

Defines the authentication mode to be used with this SOAP service.

- If HTTPBasicAuth is used, you define that the service composite authenticates the user. User name and password must then be given in the tagged value user. For more details see [Basic Authentication with the E2E Bridge](#).
- If HTTPRemoteAuth is used, a reverse proxy needs to authenticate the user and pass it to the service. The service then expects a set REMOTE-USER HTTP header. Typically the Apache reverse proxy is used for that.

Independent of the authentication mode, the user is found in the principal object if the authentication succeeded.

User	Specifies user and password for the use of HTTP Basic authentication.
-------------	---

For detailed information on these tagged values refer to [S OAP Service Reference](#).

The screenshot shows a dialog box titled "New SOAP Service" with a close button (X) in the top right corner. Below the title bar, there's a section "Create New SOAP Service" with the instruction "Enter name and documentation of the new SOAP service." Below this, there are three tabs: "Standard", "Advanced", and "Proxy". The "Proxy" tab is selected. Under the "Proxy" tab, there are several input fields: "External Proxy Host", "Proxy Host", "Proxy Path", "Proxy Port" (with a spinner control), and "Proxy Protocol" (a dropdown menu showing "https"). At the bottom of the dialog, there are "OK" and "Cancel" buttons.


On the **Proxy** tab, you can specify the proxy details.

Tagged Value	Description
External Proxy Host	Specifies the host name as seen by the client. - If a server certificate is used, the certificate must be issued for this name. - If this tagged value is not set, the name of the node hosting the proxy is being used.
Proxy Host	Specifies the host for the proxy deployment. If localhost is used, the proxy will be created on the same host the service is deployed to. Use a dedicated host, if you want to run your proxy on a different host of the same Bridge domain. See also externalProxyHost .

	Proxy Path	Specifies the part of the overall URL that is mapped to the actual host name and port. i If proxyPath is used, the modeler must ensure that this value is unique within the proxy.
	Proxy Port	Specifies the port the proxy is listening to.
	Proxy Protocol	Specifies the used proxy protocol.
For detailed information on these tagged values refer to S OAP Service Reference.		

Proceed with **OK**.

Now, in the component diagram the service component is placed within the service composite component.


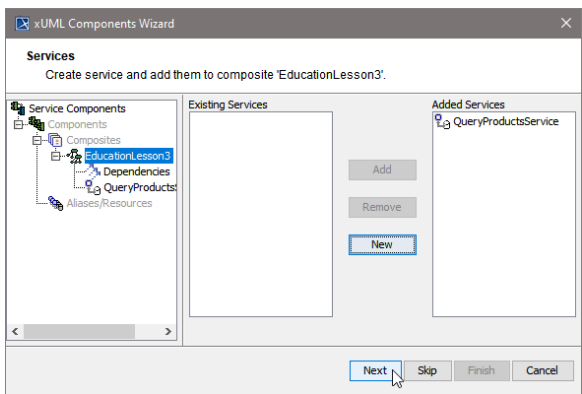


In the customization panel on the right, you will find the new service (e.g. **QueryProductsService**).

Click **Next** to proceed.

Step 4: Defining the SOAP Service Interface

In the next step, you will define the interface of the SOAP service. Through this interface, the Web service is accessible from the outside world.

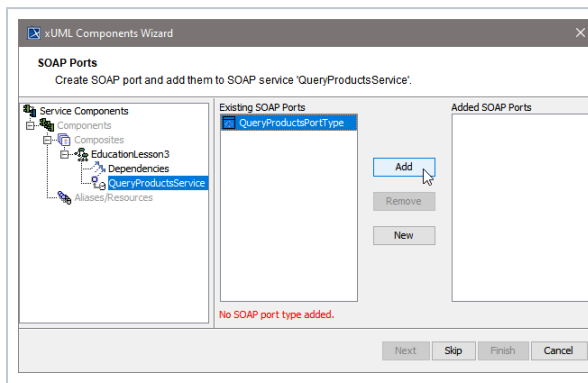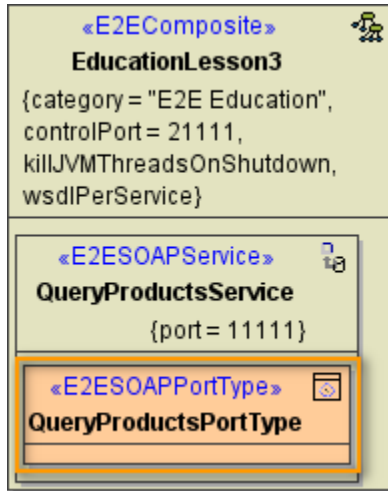

The Components Wizard lists all port type classes on the left. Select a port type and click **Add** to add the port type to the composite.

Edit SOAP Port Type

Edit name, operation(s) (mandatory), and documentation (mandatory) of the SOAP port type.

Name

QueryProductsPortType

Namespace

Path

Documentation

The port type provides an operation to query an XML file containing product c
The search result is displayed in the client application.


OK Cancel

In the following dialog, assign a name to the port type or use the default name suggested.

Special character
s and
blanks
are not
allowed
for
compon
ent names.

- Provide a **Names**
pace if necessar
y.
- Provide a **path**, if you want to make this compone
nt independ
ent of the
package
structure. Without a given path, port types are identified by port type name and package URL.

Proceed with **OK**.

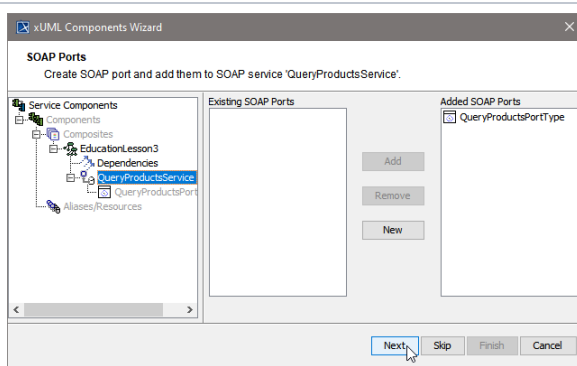


In the artifact part of the customization panel, you will find the added port type **QueryProductsPortType**.

As an interface can only be used once in a composite, the port type **QueryProductsPortType** is not displayed anymore in the SOAP Port Types list on the left.


Each port type class (representing the interface of the SOAP service) can only be used once in a composite.

Click **Next** to proceed.

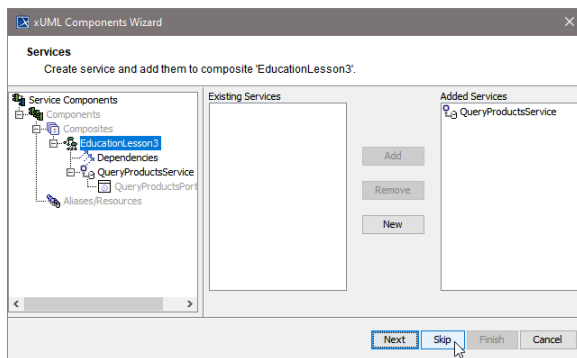

In the **Customized Artifacts** part of the tree panel, the xUML service is selected again to give you the option to define further frontend services (see [Defining the Frontend Service](#)).

If you do not need any further elements, click **Skip**.

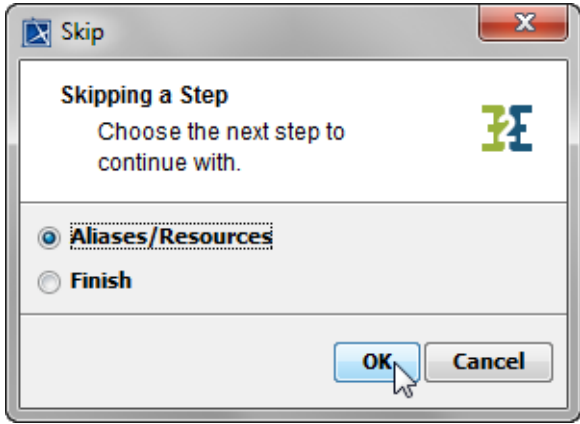



For definition of **Backend Services (Aliases/Resources)** see below ([Defining Backend Aliases](#)).

For **Finishing** the Components Wizard see [Finishing the Components Wizard](#).


Step 5: Defining Backend Aliases

In this step, backend aliases are defined. The Components Wizard provides predefined Backend Components.

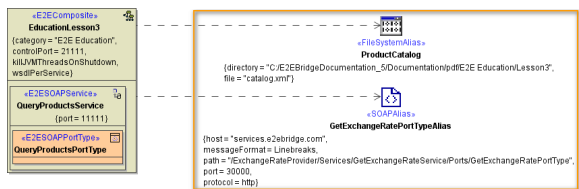

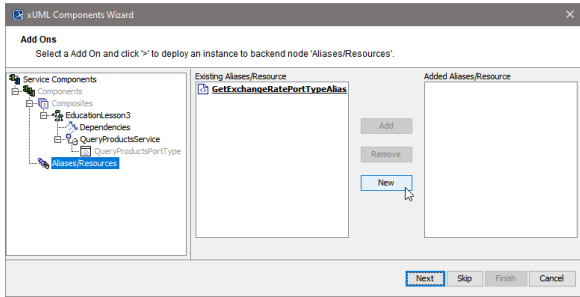

Click **New** to create a new backend alias ...

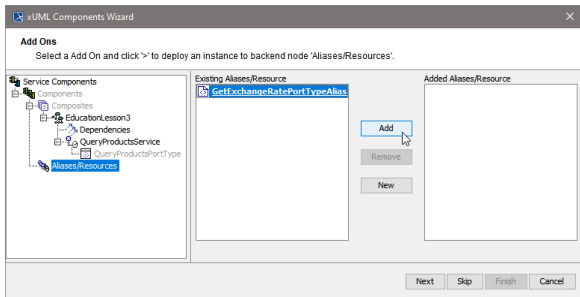


...or select an existing alias and click **Add** to add it to the component diagram.


For adding a new alias, choose one of the following possible backend service stereotypes:

Backend Aliases

- FileSystemAlias
- JMSAlias
- POP3Alias
- SAPAlias
- SMTPAlias
- SOAPAlias
- SQLAlias
- URLAlias

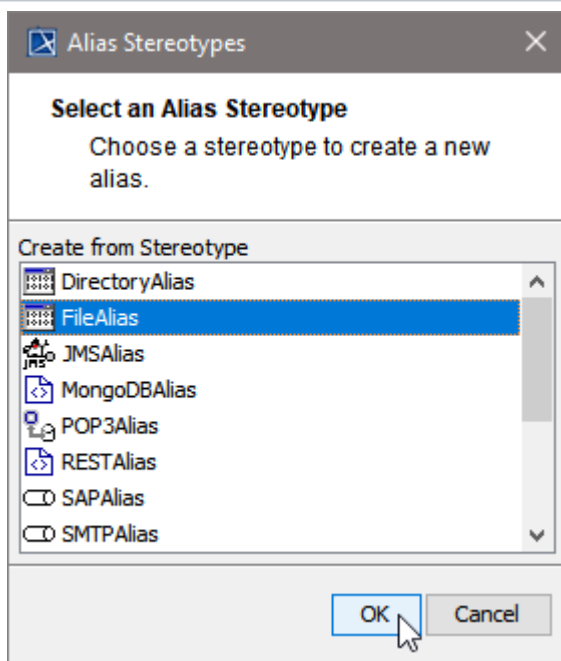


Choose a backend alias stereotype from the list of available stereotypes, e.g. **FileAlias** and click **OK**.

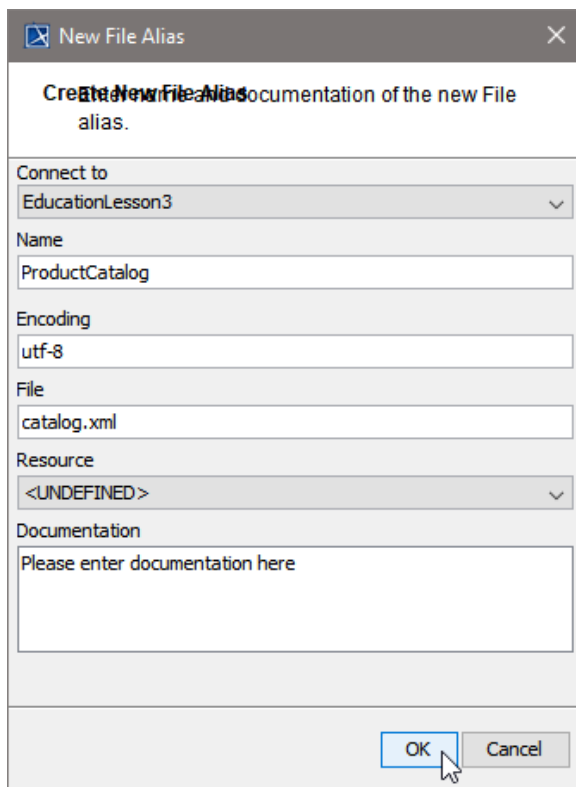

Assign a name to the alias or leave the default name suggested.

Specify **File Name** and **Path**, or, if you wanted to read data from an imported resource, select the resource from the **Resource** drop-down box instead.

Click **OK**.

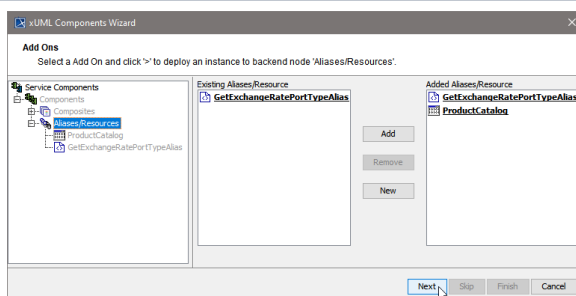


In right part of the customization panel, you will find the new file system alias (e.g. **ProductCatalog**).

Click **Next**.

Step 6: Finishing the Components Wizard

This is the final step of the Components Wizard where you confirm to draw the component diagram. If the definitions are not complete yet, you can select an element node in the tree panel and add further UML elements to the diagram.

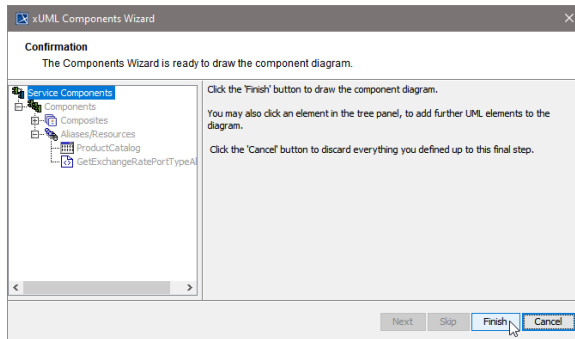

The Components Wizard generates the component diagram. If no errors occurred, it is necessary to save the model. On saving, the deployment data of the Model Compiler gets refreshed and you can proceed with e.g. compiling the model.