


Single Connector

A connector describes a configuration for an [adapter](#) to access a backend system. Refer to [Creating Connectors](#) for more details on creating and managing connectors.

Connector Options

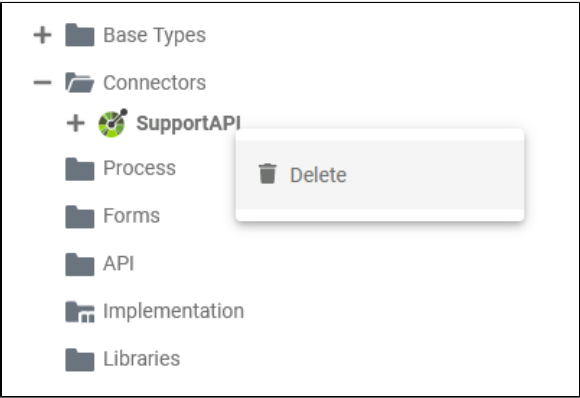

Right-click a form to open its context menu.

The context menu displays all options available for the connector:

- [Delete](#)

On this Page:


- [Connector Options](#)
- [Changing the Configuration of a Connector](#)

Related Pages:


- [Service Panel](#)
 - [Managing the Service Details](#)
 - [Base Types](#)
 - [Connectors](#)
 - [Single Connector](#)
 - [Process](#)
 - [BPMN Model](#)
 - [Forms](#)
 - [Single Form](#)
 - [API](#)
 - [Implementation](#)
 - [Libraries](#)
 - [Exporting and Importing Service Panel Contents](#)
- [Working With the Explorer](#)
 - [Services](#)
- [Creating Connectors](#)
 - [Creating an OpenAPI Connector](#)
 - [Creating an SAP RFC Connector](#)
- [Using Connectors](#)
- [Adapters](#)


Changing the Configuration of a Connector

To change the configuration of a connector, also use the **Manage Connectors** dialog.



You need to configure the connector from scratch and apply your changes. The old connector will be replaced by the new configuration.

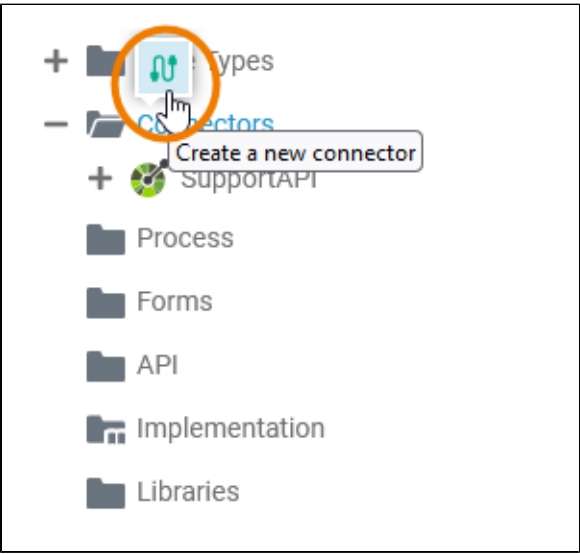

Hover with your mouse over the **Connectors** folder in the service panel. Click the  icon to open the connector management.

Proceed with the configuration as described in [Creating a Connector](#).